


Hydraulic Bottle Jacks



- AC bottle jacks – when safety is a top priority.
- The bevelled base plate ensures greater stability as the jack follows the tilt of the vehicle during the lifting operation.
- Long lifetime due to a design of the base plate that minimizes the risk of injuries to the piston and the piston rod.
- All models are supplied with tripartite handle.
- Model ATN10-175 with horizontal movement.

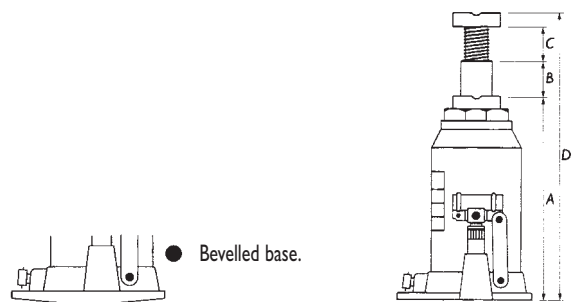

Technical Data

Model	Lift.cap. ton	Min. height mm A	Hydr. lift mm B	Spindle mm C	Max. height mm D	Net weight	Bevelled base	With single cylinder	With tele- scopic cylinder
A2-170	2,0	170	115	92	377	3,5		●	
A3,5-170	3,5	170	115	92	377	3,8		●	
A5-212	5,0	212	150	100	462	4,7		●	
AX8-220	8,0	220	150	110	480	7,0	●	●	
A10-220	10,0	220	150	110	480	7,0	●	●	
A12-230	12,0	230	157	110	497	8,1	●	●	
A15-230	15,0	230	155	110	495	9,2	●	●	
A20-240	20,0	240	155	110	505	11,8	●	●	
AH25-240	25,0	240	157	118	515	14,3	●	●	
A30-240	30,0	240	142	100	482	15,3	●	●	
A50-250	50,0	250	155	-	405	40,0		●	
A100-300	100,0	300	150	-	450	70,0		●	
ATDX3-185	3,0	185	215	-	400	5,0	●		●
AT5-215	5,0	215	305	-	520	7,2	●		●
ATG10-200	10,0	200	262	68	530	10,2	●		●
ATPX12-230	12,0	230	255	85	570	13,4	●		●
ADX4-370	4,0	370	260	-	630	7,3		●	
ADX10-370	10,0	370	260	-	630	10,5	●	●	
ATN10-175	10,0	175	210	-	385	8,7			●